

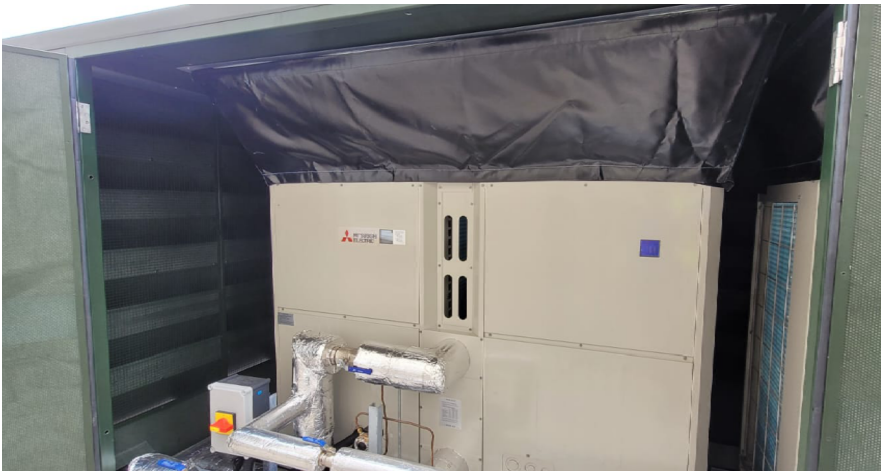


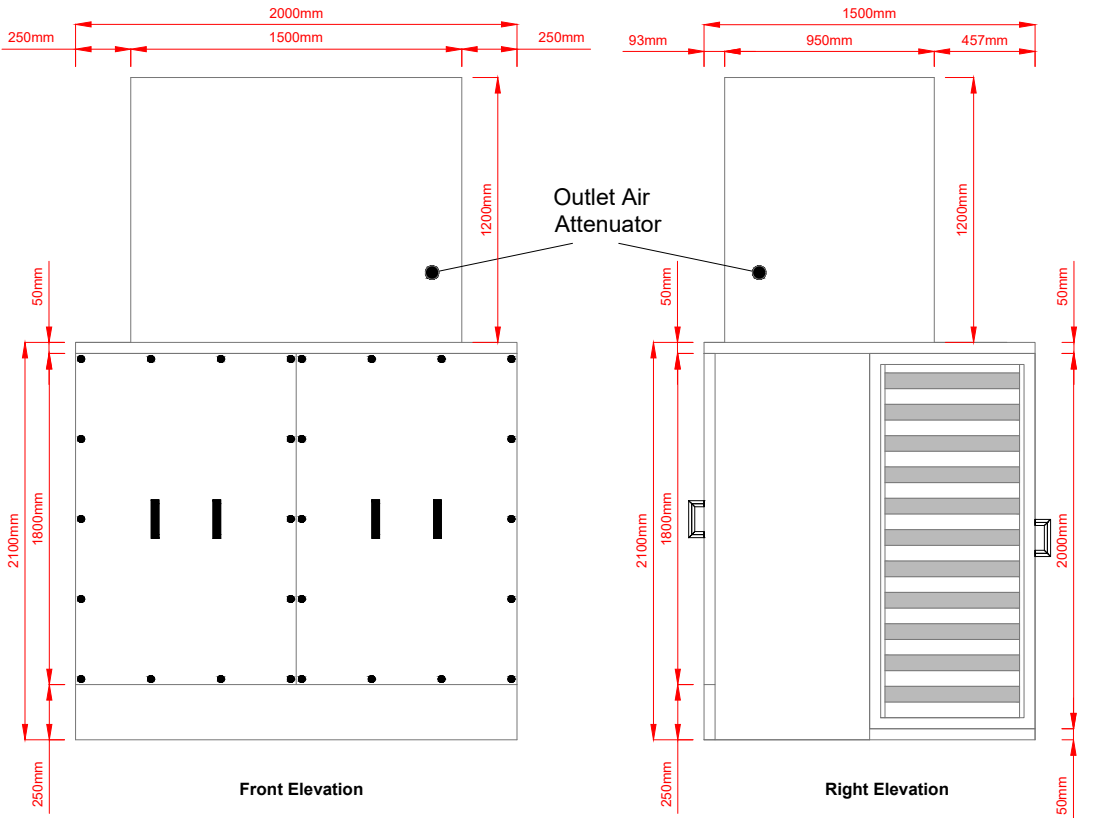

Flexible Connector / Air Divider



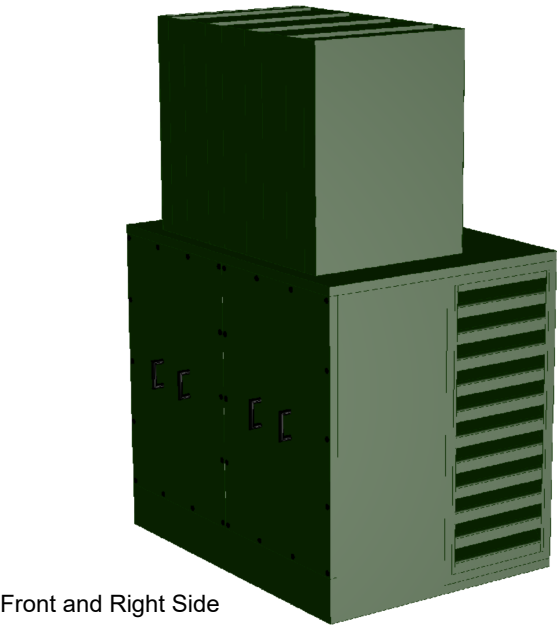


Front and Right Side

3D Views

SOUND REDUCTION								
Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
IL (to 1DP) (dB)	13	15.5	19.5	21	18.5	21	22.5	23.5

Field test was carried out in accordance with BS EN ISO 11546-2: 1996 acoustics -Determination of sound insulation performance of enclosures. Part 2 Measurements in situ (for acceptance and verification purposes).

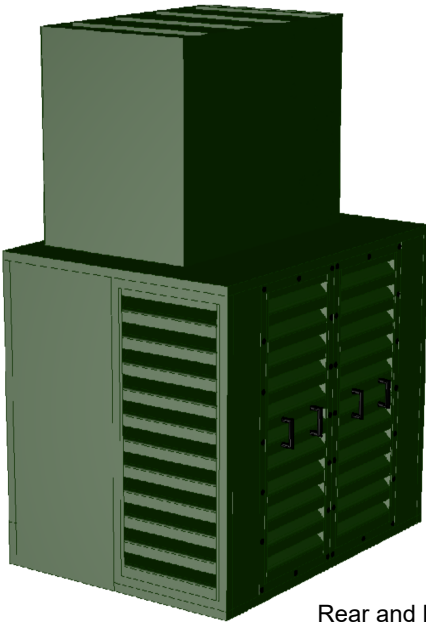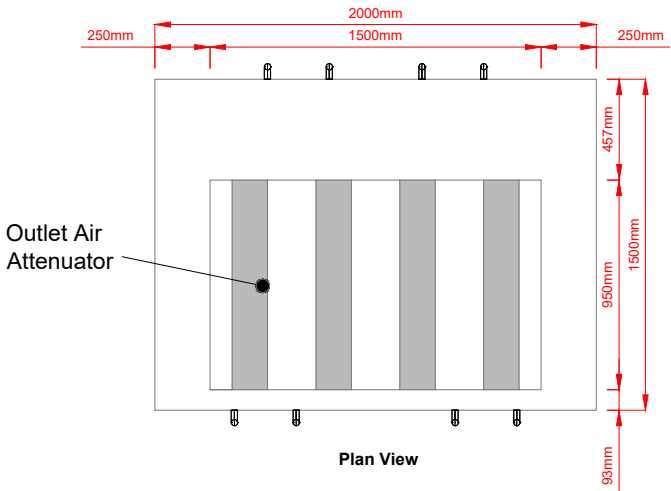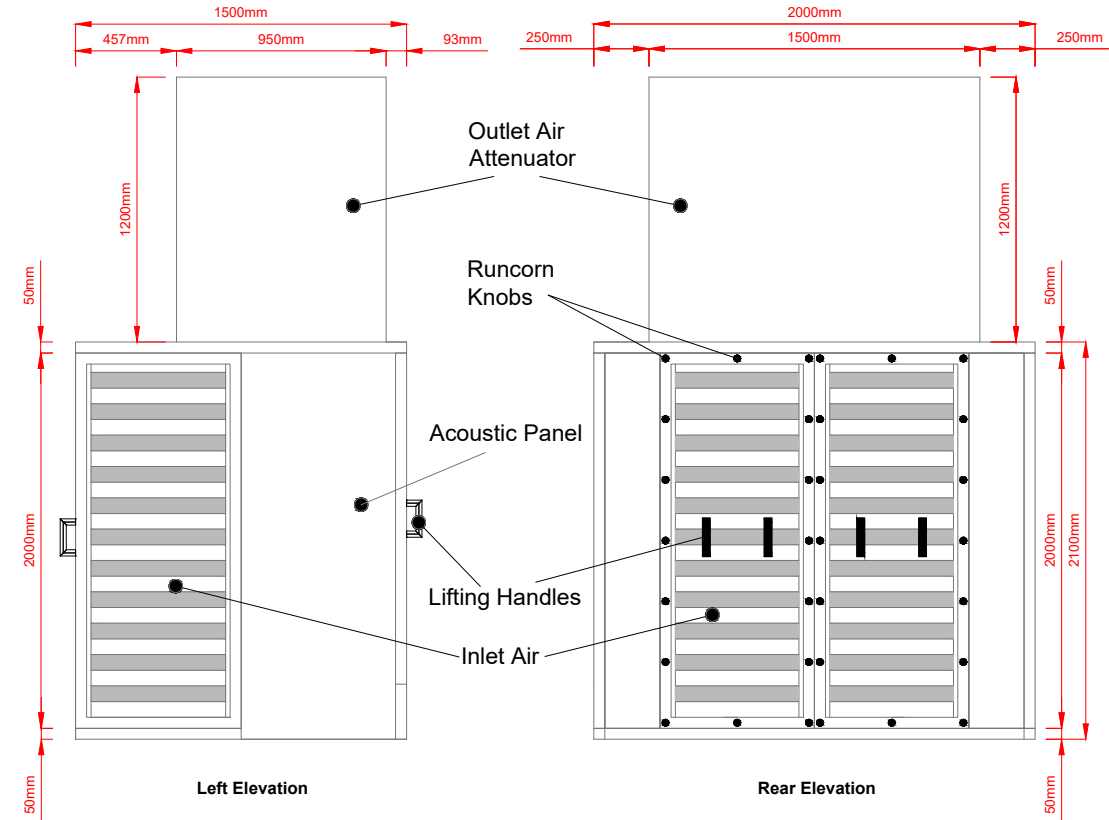

Rear and Right Side

Notes

- Galvanised Steel Construction (Polyester Powder Coated to any standard RAL)
- High Density Acoustic Media
- Demountable Service Access Panels
- Designed for compliance with recommended OEM pressure drops